

L A I R D F A M I L Y B O T T L I N G


Specifications: Labeling

Our professional bottling crew has over 13 years experience...

The Impresstik labeler uses vacuum belt technology in a linear style machine. This provides good quality label application on most all round glass containers.

The following printing specs are required for pressure sensitive* labels to run on our machine:

- Front & back labels on separate webs or front & back labels on same web. We prefer same web when not using tapered bottles.
- Labels should be wound industry standard #4 (labels face outside roll with left edge or either label leading).
- A minimum of 1/8 inch spacing between labels for electronic sensing.
- Label rolls must not exceed 14 inches in overall diameter or excessive waste will occur.
- Maximum overall label height is 6 inches.
- Minimum overall label height is 1/2 an inch.
- Minimum label width is 2 inches.
- Center of label roll core is 3 inches.

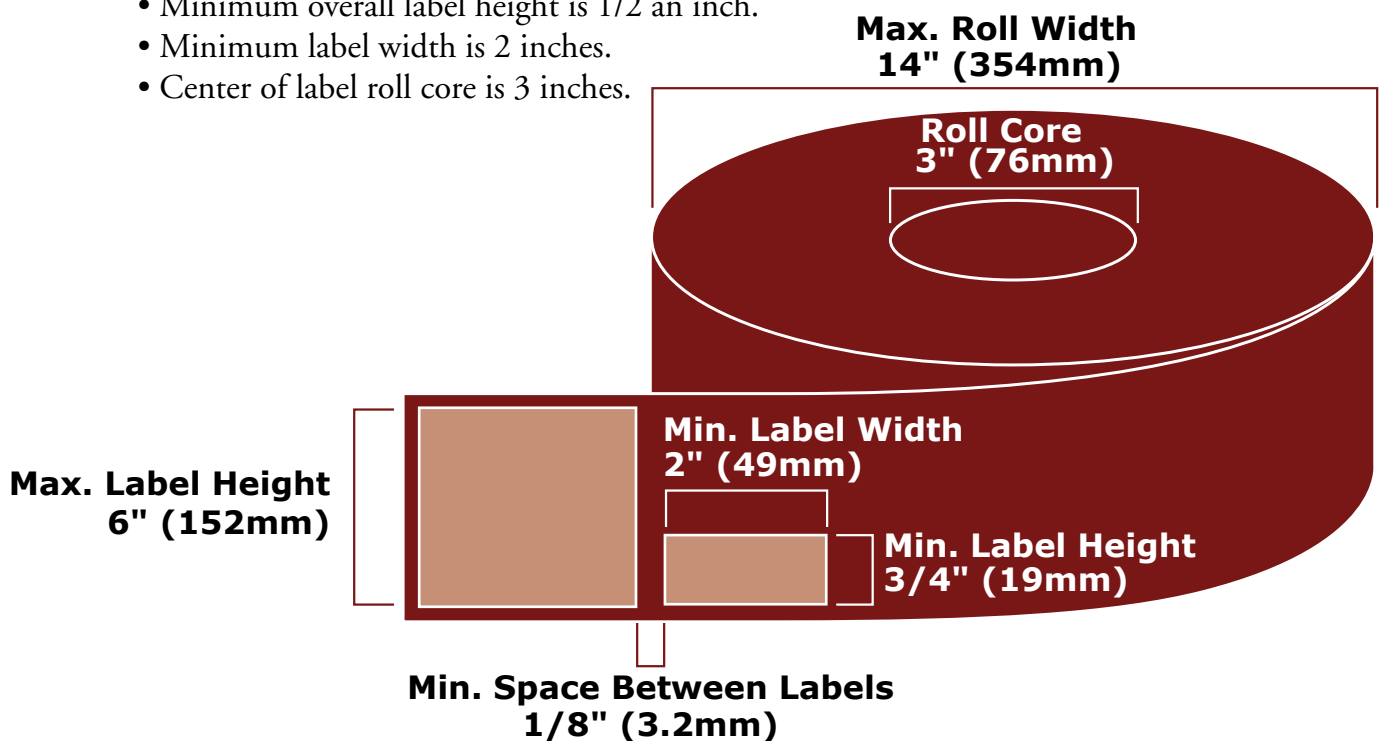

Important: When creating label to apply to a tapered bottle you must print front & back labels on separate webs. This allows us to adjust for skewed labels on a separate basis.

Mobile bottling ... enabling those with smaller quantities to cost-effectively preserve their creations.